


SIDE-MOUNT SAND FILTER WITH MULTI-PORT VALVE SERIES

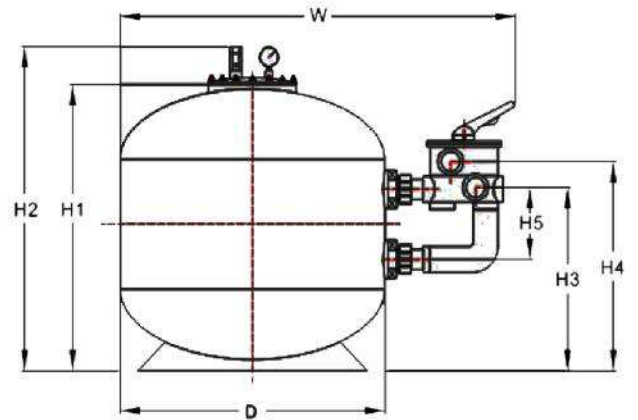

FEATURES

Tank : voluble molding of fiber glass reinforced plastics,corrosion,good abrasion resistance, deforming-proof. Uniquely designed distribution make a stable and even water flow to improve drainage system. Easy to install,maintain free.

Outlet turbidity:<2FTU



ITEM- CODE	Diameter ϕ D(mm)	Inch/ mm	Flow (m ³ /h)	F area(m ²)	(H1) mm	(H2) mm	(H3) mm	(H4) mm	(H5) mm	(W) mm	(WS) kg	(NW) kg	(GW) kg
OXY-SS-525	525	1.5"	12	0.19	610	720	410	475	150	885	65	14.1	18.1
OXY-SS-600	600	1.5"	14	0.22	620	730	430	495	150	960	115	16.9	21.4
OXY-SS-650	650	1.5"	17	0.32	695	805	450	515	150	1010	145	20	25.5
OXY-SS-700	700	1.5"	19	0.35	715	825	470	535	150	1060	180	22.3	27.8
OXY-SS-750	750	2.0"	21	0.40	765	875	540	615	200	1140	225	25.7	32.7
OXY-SS-800	800	2.0"	24	0.50	815	925	550	625	201	1190	275	28.8	36.3
OXY-SS-900	900	2.0"	30	0.64	900	1010	620	695	202	1290	390	35.4	44.9
OXY-SS-1050	1050	2.0"	38	0.88	1065	1175	700	775	203	1440	615	53.3	58.8
OXY-SS-1200	1200	2.0"	42	1.13	1200	1310	780	855	204	1590	920	59.8	65.4