



# SIDE - MOUNT SAND FILTER WITH VALVE SYSTEM SERIES

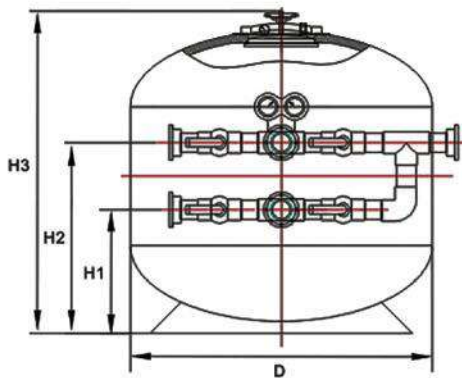

Manual control valve

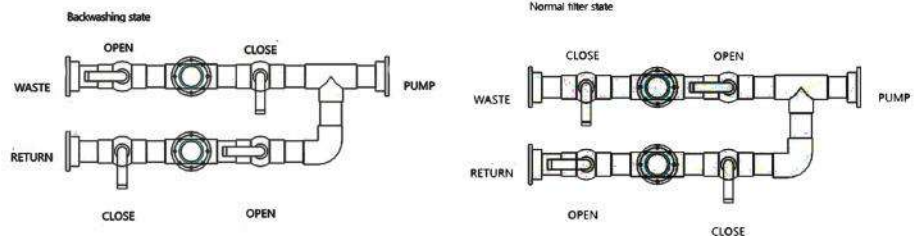

## FEATURES

Tank : voluble molding of fiber glass reinforced plastics, corrosion resistant, good abrasion resistance, deforming-proof. Uniquely designed distribution make a stable and even water flow to improve drainage system. Easy to install,maintain free. Outlet turbid-ity:<2FTU.

ITEM NUMBER	DIAMETER D (mm)	Inch /mm	Flow( m3/h)	Filtration area(m3)	(H1) mm	(H2) mm	(H3) mm	(WS) kg	Package (mm) LxWxH	(NW) kg	(GW) kg
OXY-SS 1400	1400	3"	56	1.25	650	950	1480	1460	1350x1350x1580	116	130.2
OXY-SS 1600	1600	3"	100	2.01	650	950	1680	2180	1500x1500x1780	131	154.3
OXY-SS 1800	1800	4"	125	2.54	750	1100	1890	3100	1950x1950x1990	254	298.8
OXY-SS 2000	2000	6"	153	3.14	890	1290	2120	4250	1950x1950x2220	312	357.5